


M623 Signal Straight Mating Male Metal Assembled Plug (Crimp)

尺寸图

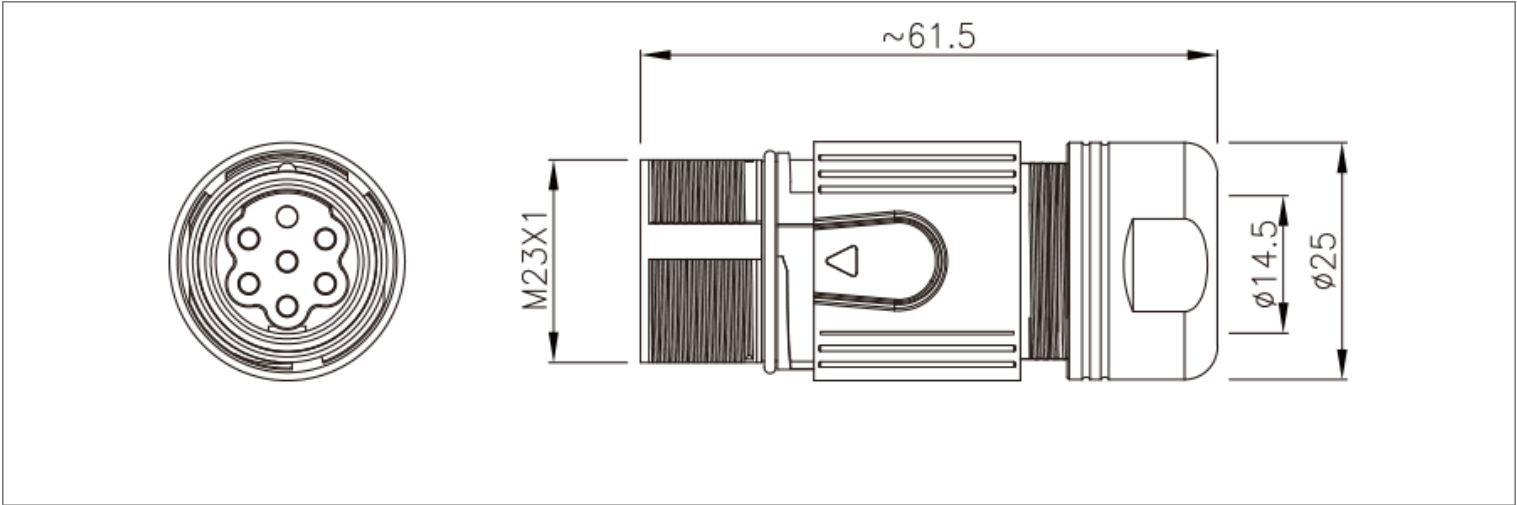

接线定义

| 芯位 | 线芯颜色  |  | 导体规格               |
|----|-------|--|--------------------|
|    | 6芯    |  |                    |
| 1  | BK U  |  | 1.5mm <sup>2</sup> |
| 2  | BN V  |  | 1.5mm <sup>2</sup> |
| 3  | GN YE |  | 1.5mm <sup>2</sup> |
| 4  | BK    |  | 1.5mm <sup>2</sup> |
| 5  | WH    |  | 1.5mm <sup>2</sup> |
| 6  | BN K  |  | 1.5mm <sup>2</sup> |

| 芯位 | 线芯颜色  |  | 导体规格                |
|----|-------|--|---------------------|
|    | 8芯    |  |                     |
| 1  | BK 1  |  | 1.5mm <sup>2</sup>  |
| PE | GN YE |  | 1.5mm <sup>2</sup>  |
| 3  | BK 2  |  | 1.5mm <sup>2</sup>  |
| 4  | BK 3  |  | 1.5mm <sup>2</sup>  |
| A  | BK 5  |  | 0.75mm <sup>2</sup> |
| B  | BK 6  |  | 0.75mm <sup>2</sup> |
| C  | BK 7  |  | 0.75mm <sup>2</sup> |
| D  | BK 8  |  | 0.75mm <sup>2</sup> |

| 芯位 | 线芯颜色 |  | 导体规格                |
|----|------|--|---------------------|
|    | 12芯  |  |                     |
| 1  | PK   |  | 0.25mm <sup>2</sup> |
| 2  | RD   |  | 0.25mm <sup>2</sup> |
| 3  | BK   |  | 0.25mm <sup>2</sup> |
| 4  | BU   |  | 0.25mm <sup>2</sup> |
| 5  | BN   |  | 0.25mm <sup>2</sup> |
| 6  | GN   |  | 0.25mm <sup>2</sup> |
| 7  | VT   |  | 0.25mm <sup>2</sup> |
| 8  | GY   |  | 0.25mm <sup>2</sup> |
| 9  | 外部护套 |  |                     |
| 10 | WH   |  | 0.5mm <sup>2</sup>  |
| 11 | NC   |  |                     |
| 12 | BN   |  | 0.5mm <sup>2</sup>  |

| 芯位 | 线芯颜色 |  | 导体规格                |
|----|------|--|---------------------|
|    | 17芯  |  |                     |
| 1  | YE   |  | 0.14mm <sup>2</sup> |
| 2  | GN   |  | 0.14mm <sup>2</sup> |
| 3  | RD   |  | 0.14mm <sup>2</sup> |
| 4  | NC   |  |                     |
| 5  | BU   |  | 0.14mm <sup>2</sup> |
| 6  | NC   |  |                     |
| 7  | BNBU |  | 0.5mm <sup>2</sup>  |
| 8  | GNBK |  | 0.22mm <sup>2</sup> |
| 9  | GNRD |  | 0.22mm <sup>2</sup> |
| 10 | BNRD |  | 0.5mm <sup>2</sup>  |
| 11 | BK   |  | 0.14mm <sup>2</sup> |
| 12 | BN   |  | 0.14mm <sup>2</sup> |
| 13 | OG   |  | 0.14mm <sup>2</sup> |
| 14 | WHBK |  | 0.14mm <sup>2</sup> |
| 15 | BNGY |  | 0.22mm <sup>2</sup> |
| 16 | BNGY |  | 0.22mm <sup>2</sup> |
| 17 | 内部护套 |  |                     |

\*接线定义按常规标准，如按协议或者其他请联系我司业务。

电气参数

M623 Signal Straight Mating Male Metal Assembled Plug (Crimp)

| 芯数      | P型                                                                                  | 额定电流   | 额定电压 |      | 导体规格  |                 | E型                                                                                    |
|---------|-------------------------------------------------------------------------------------|--------|------|------|-------|-----------------|---------------------------------------------------------------------------------------|
|         |                                                                                     |        | A/C  | D/C  | AWG   | mm <sup>2</sup> |                                                                                       |
| 6       |    | 20A    | 300V | 300V | 14    | 2.5             |    |
| 7       |    | 20A    | 300V | 300V | 14    | 2.5             |    |
| 9       |    | 8A     | 150V | 150V | 16    | 1.5             |    |
| 9P(8+1) |    | 8A/20A | 300V | 150V | 16/14 | 1.5/2.5         |    |
| 12      |    | 8A     | 150V | 150V | 18    | 1               |    |
| 17      |  | 8A     | 150V | 150V | 18    | 1               |  |