
M923 Power Straight Female Metal Assembled Plug (Crimp)

尺寸图

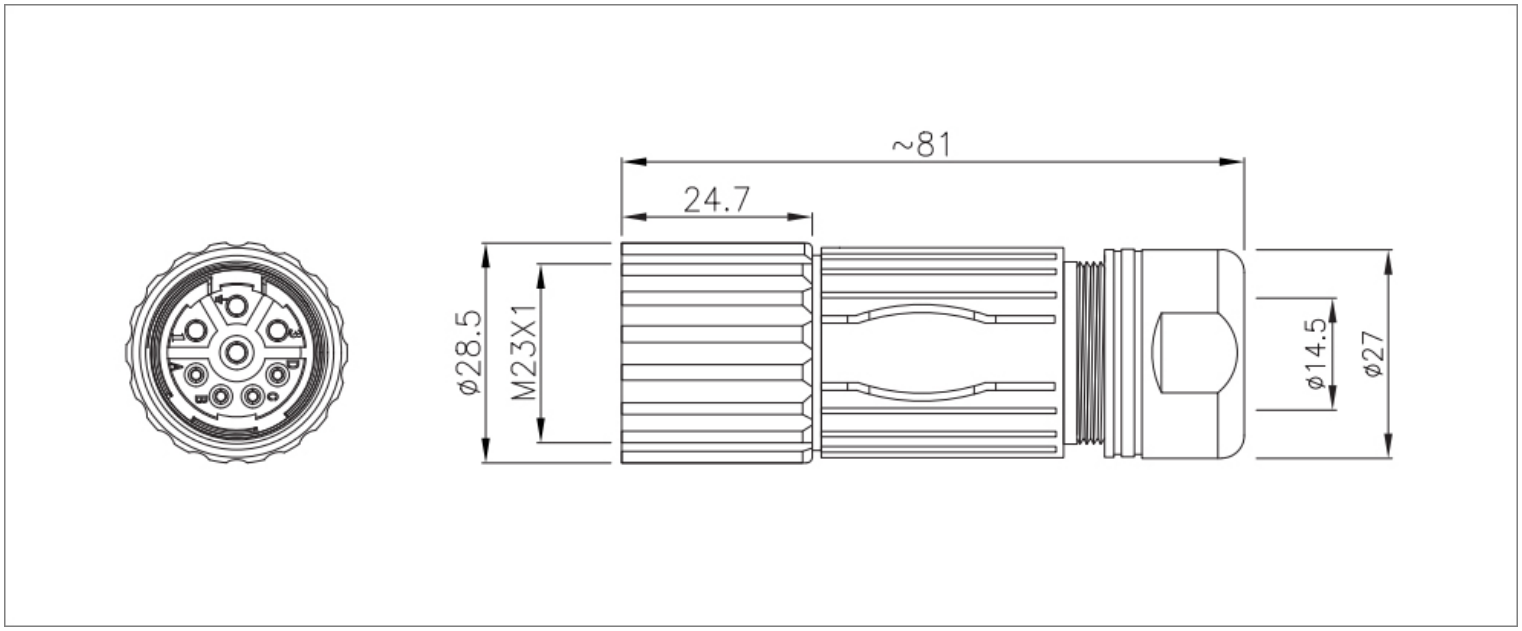

接线定义

芯位 Pins	线芯颜色 Wire core color	导体规格 Conductor size
	6芯(Pins)	
1	BK U	1.5mm²
2	BN V	1.5mm²
3	GNYE	1.5mm²
4	BK	1.5mm²
5	WH	1.5mm²
6	BN K	1.5mm²

芯位 Pins	线芯颜色 Wire core color	导体规格 Conductor size
	8芯(Pins)	
1	BK 1	1.5mm²
PE	GNYE	1.5mm²
3	BK 2	1.5mm²
4	BK 3	1.5mm²
A	BK 5	0.75mm²
B	BK 6	0.75mm²
C	BK 7	0.75mm²
D	BK 8	0.75mm²

芯位 Pins	线芯颜色 Wire core color	导体规格 Conductor size
	12芯(Pins)	
1	PK	0.25mm²
2	RD	0.25mm²
3	BK	0.25mm²
4	BU	0.25mm²
5	BN	0.25mm²
6	GN	0.25mm²
7	VT	0.25mm²
8	GY	0.25mm²
9	外部护套	(Outer sheath)
10	WH	0.5mm²
11	NC	
12	BN	0.5mm²


芯位 Pins	线芯颜色 Wire core color	导体规格 Conductor size
	17芯(Pins)	
1	YE	0.14mm²
2	GN	0.14mm²
3	RD	0.14mm²
4	NC	
5	BU	0.14mm²
6	NC	
7	BNBU	0.5mm²
8	GNBK	0.22mm²
9	GNRD	0.22mm²
10	BNRD	0.5mm²
11	BK	0.14mm²
12	BN	0.14mm²
13	OG	0.14mm²
14	WHBK	0.14mm²
15	BNGY	0.22mm²
16	BNYE	0.22mm²
17	内部护套	(Inner sheath)

*接线定义按常规标准，如按协议或者其他请联系我司业务。
Wiring definition according to conventional standards, if according to the agreement or other please contact our sales.

电气参数

STA思大-元器件专业提供商!

M923 Power Straight Female Metal Assembled Plug (Crimp)

芯数 Pins	针型 Male	额定电流 Ratedcurrent	额定电压 Rated voltage		导体规格 Conductor size		孔型 Female
			A/C	D/C	AWG	mm²	
6		30A	630V	630V	14	2.5	
8		9A/20A	250V/630V	250V/630V	18/14	1/2.5	