


尺寸图

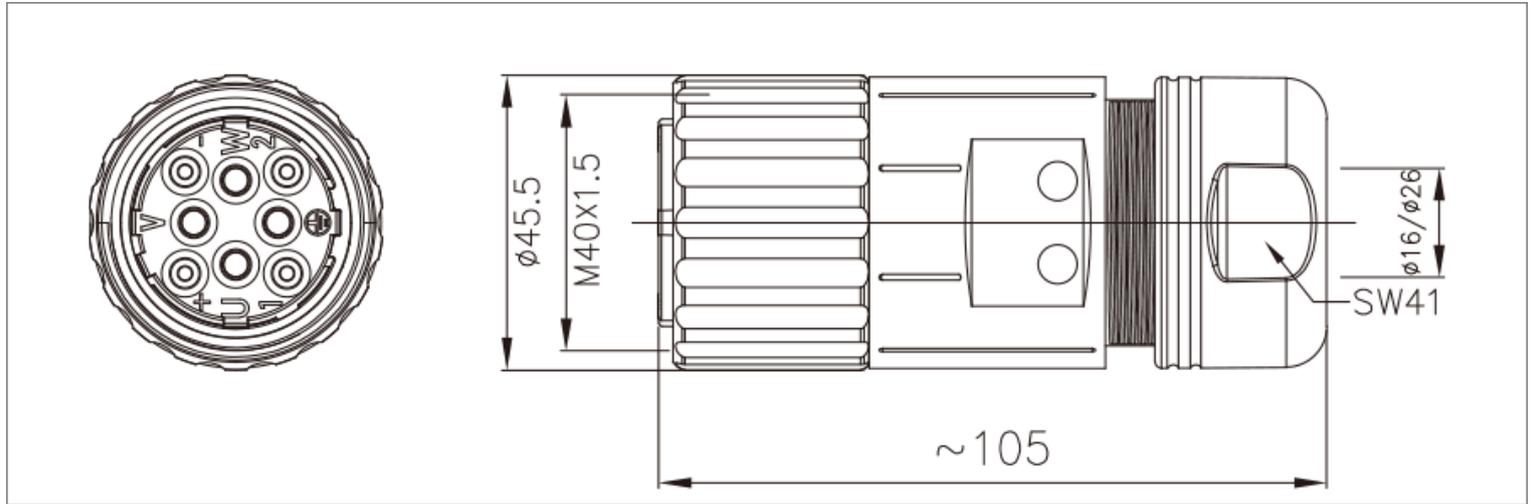

插针参数表

M40 铆压插针
 材料：铜镀金

接触直径： $\phi 3.6$

接触直径： $\phi 2$

M923 铆压式公针

线规
1.0-2.5mm ²
2.5-4.0mm ²
4.0-6.0mm ²
6.0-10.0mm ²

M923 铆压式母针

线规
0.25-1.0mm ²
0.75-1.5mm ²
1.0-2.5mm ²
4.0-4.0mm ²

接线定义

芯位	线芯颜色		导体规格
	2+3+PE芯		
U	BK		3.6mm ²
V	BK		3.6mm ²
W	BK		3.6mm ²
PE \perp	GNYE		3.6mm ²
+	BK		2.0mm ²
-	WH		2.0mm ²

芯位	线芯颜色		导体规格
	4+3+PE芯		
U	BK		3.6mm ²
V	BK		3.6mm ²
W	BK		3.6mm ²
PE \perp	GNYE		3.6mm ²
+	BK		2.0mm ²
-	BK		2.0mm ²
1	BK		2.0mm ²
2	BK		2.0mm ²

电气参数

芯数	针型	额定电流	额定电压		导体规格 mm ²	孔型
			A/C	D/C		
2+3+PE		70A/30A	630V	250V	3.6/2	
4+3+PE		70A/30A	630V	250V	3.6/2	