




- 产品类型：照明端子,
- 接线方式：线对线端子,
- 绝缘材料：聚碳酸酯(PC),
- 导体材料：铜,
- 剥线长度: 11mm/0.43inches,
- 位数：2P , 3P , 4P , 5P

基本参数

电压(Rated voltage)-UL:	-
电流(Rated current)-UL:	-
电压(Rated voltage)-IEC:	450V
电流(Rated current)-IEC:	32A
线径(Wire range)-UL:	24-12AWG
线径(Wire range)-IEC:	0.14-4mm ²
剥线长度(Wire stripping length):	11mm/0.43inches
材质(Material quality):	聚碳酸酯(PC)
阻燃等级(Flame Rating):	UL94-V2
导体材料(Conductor material):	铜
位数(Pole number):	2P , 3P , 4P , 5P
工作环境温度(运行时)(Working environment temperature (during operation)):	+85℃
持续工作温度(Continuous operating temperature):	105℃
认证(Approval):	

尺寸图

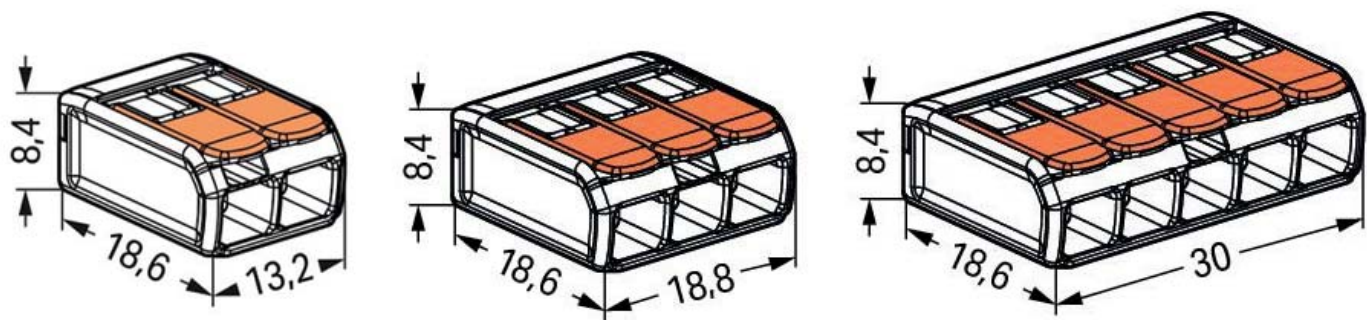

订购产品

产品名称	线径	位数	产品型号	3D下载	2D下载
线对线端子2201	24-12AWG/0.14-4mm²	2P	2201-2P		
线对线端子2201	24-12AWG/0.14-4mm²	3P	2201-3P		
线对线端子2201	24-12AWG/0.14-4mm²	4P	2201-4P		
线对线端子2201	24-12AWG/0.14-4mm²	5P	2201-5P		

资料下载

产品目录	接线端子选型手册
------	--------------------------