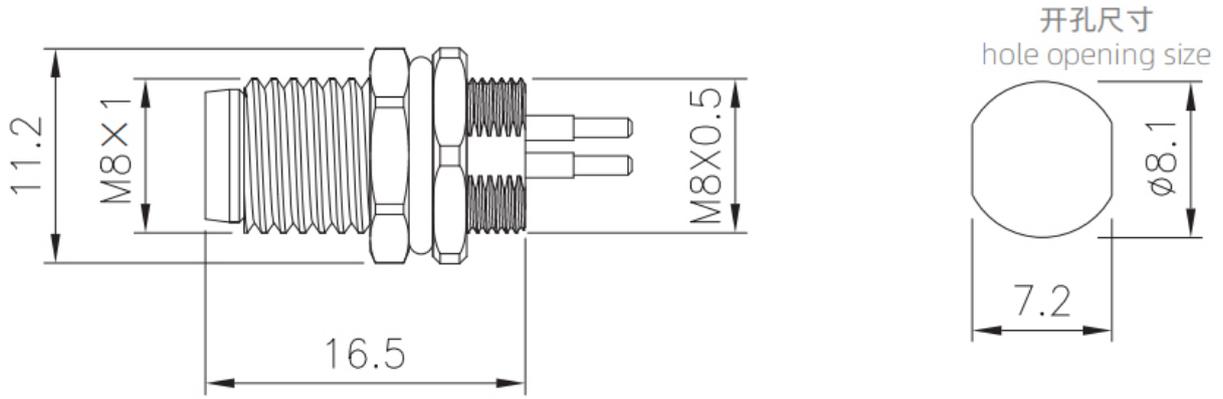













尺寸图



PCB芯位图

3	4	4D	5B	6	8
<p>Diagram showing 3 pins with a pitch of 3.5 and a diameter of $\phi 1.2$. The distance from the center of the top pin to the center of the bottom pin is 1.75.</p>	<p>Diagram showing 4 pins with a pitch of 3.4 and a diameter of $\phi 1.2$. The distance between the top two pins is 2.15, and the distance between the bottom two pins is 0.5. The distance from the center of the top row to the center of the bottom row is 1.45.</p>	<p>Diagram showing 4 pins with a pitch of 3.3 and a diameter of $\phi 1.2$. The distance from the center of the top pin to the center of the bottom pin is 3.3.</p>	<p>Diagram showing 5 pins with a pitch of 3.4 and a diameter of $\phi 1.2$. The distance between the top two pins is 1.95, and the distance between the bottom two pins is 0.35. The distance from the center of the top row to the center of the bottom row is 1.35.</p>	<p>Diagram showing 6 pins with a pitch of 2.75 and a diameter of $\phi 0.8$. The distance between the top two pins is 3.5, and the distance between the bottom two pins is 1.9. The distance from the center of the top row to the center of the bottom row is 0.74. The distance from the center of the top row to the center of the middle row is 1.32.</p>	<p>Diagram showing 8 pins with a pitch of 3.7 and a diameter of $\phi 0.8$. The distance between the top two pins is 2.9, and the distance between the bottom two pins is 1.8. The distance from the center of the top row to the center of the bottom row is 1.2. The distance from the center of the top row to the center of the middle row is 1.85. The distance from the center of the top row to the center of the bottom row is 1.65.</p>

电气参数

芯数 Pins	针型 Male			额定电流 Rated current	额定电压 Rated voltage		导体规格 Conductor size		孔型 Female			
	A	B	D		A/C	D/C	AWG	mm ²	A	B	D	
3				3A	60V	60V	24	0.25				
4				A型(A-Code): 3A D型(D-Code): 4A	A型(A-Code): 60V D型(D-Code): 48V	60V	24	0.25				
5				3A	30V	30V	24	0.25				
6				A型(A-Code): 1.5A D型(D-Code): 1.5A/3A		30V	30V	26	0.14			
8				1.5A		30V	30V	26	0.14			