




- 产品类型：PCB端子,
- 接线方式：弹簧连接,
- 间距：2.50mm(5.00mm),
- 电压：250V,
- 电流：2A,
- 位数：2-24P


### 基本参数

间距(Pitch):	2.50mm(5.00mm)
电压(Rated voltage)-UL:	250V
电流(Rated current)-UL:	2A
电压(Rated voltage)-IEC:	250V
电流(Rated current)-IEC:	2A
线径(Wire range)-UL:	20AWG
线径(Wire range)-IEC:	0.2~0.5mm <sup>2</sup>
位数(Pole number):	02~24P
绝缘材料(Insulation Material):	PA66 UL94 V-0
电流承载部件材料和镀层(Material & Plating of Current carrier):	Copper alloy, Sn plated
绝缘电阻(Insulation Resistance):	500MΩ or more at DC500V
耐电压(1分钟)(Withstanding Voltage/1Min):	1500V
剥线长度(Wire stripping length):	9.0mm
使用温度(Operating temperature):	-40°C ~ +105°C
焊接方式(Soldering recommend):	Wave soldering, 260°C 5S Max (Single Wave), 260°C 10S Max(Double Wave)
认证(Approval):	


尺寸图

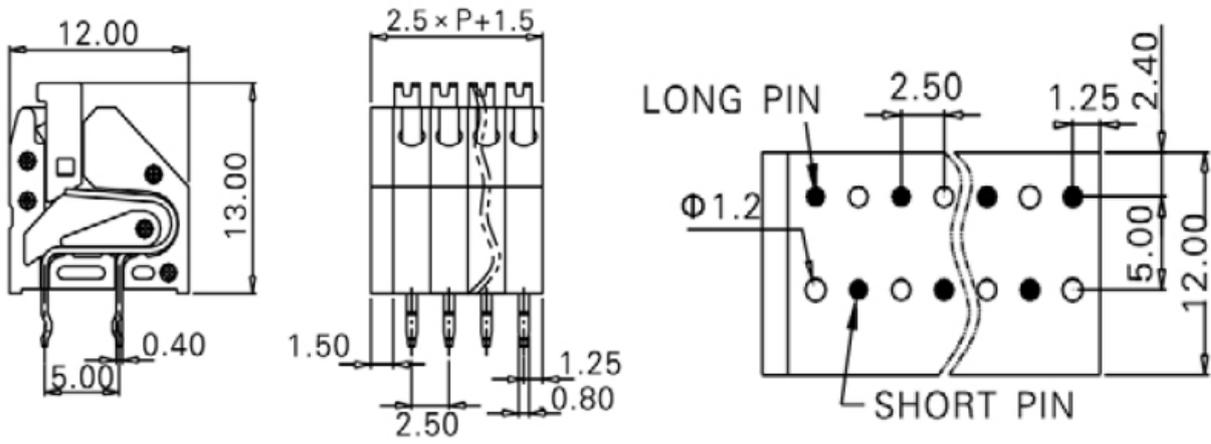


PCB Layout



SA254-11

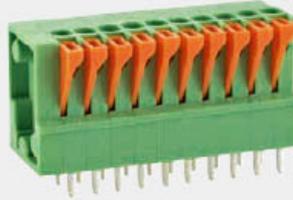

SM254-00



SM254-00R

间距(Pitch):	2.54mm	
标准(Standard):	UL	IEC
电压(Rated voltage):	150V	160V
电流(Rated current):	6A	8A
线径(Wire range):	30-18AWG	1.0mm <sup>2</sup>
位数(Pole number):	02~24P	
认证(Approval)		
UL(Applying) VDE(Applying)		

间距(Pitch):	2.54mm	
标准(Standard):	UL	IEC
电压(Rated voltage):	150V	130V
电流(Rated current):	2A	-
线径(Wire range):	26-20AWG	1.0mm <sup>2</sup>
位数(Pole number):	02~24P	
认证(Approval)		
 		

间距(Pitch):	2.54mm	
标准(Standard):	UL	IEC
电压(Rated voltage):	150V	130V
电流(Rated current):	2A	-
线径(Wire range):	26-20AWG	1.0mm <sup>2</sup>
位数(Pole number):	02~24P	
认证(Approval)		
 		



SM250-C  
SM500-C



SM250-D  
SM500-D

间距(Pitch):	2.50mm(5.00mm)	
标准(Standard):	UL	IEC
电压(Rated voltage):	250V	250V
电流(Rated current):	2A	2A
线径(Wire range):	20AWG	0.2-0.5mm <sup>2</sup>
位数(Pole number):	02~24P	
认证(Approval)		
  		

间距(Pitch):	2.50mm(5.00mm)	
标准(Standard):	UL	IEC
电压(Rated voltage):	250V	250V
电流(Rated current):	2A	2A
线径(Wire range):	20AWG	0.2-0.5mm <sup>2</sup>
位数(Pole number):	02~24P	
认证(Approval)		
  		

## 订购产品

产品名称	间距	位数	产品型号	3D下载	2D下载
固定式端子	2.50mm	02~24P	SM250-C		
固定式端子	5.00mm	02~24P	SM500-C		

## 资料下载

产品目录

[接线端子选型手册](#)