

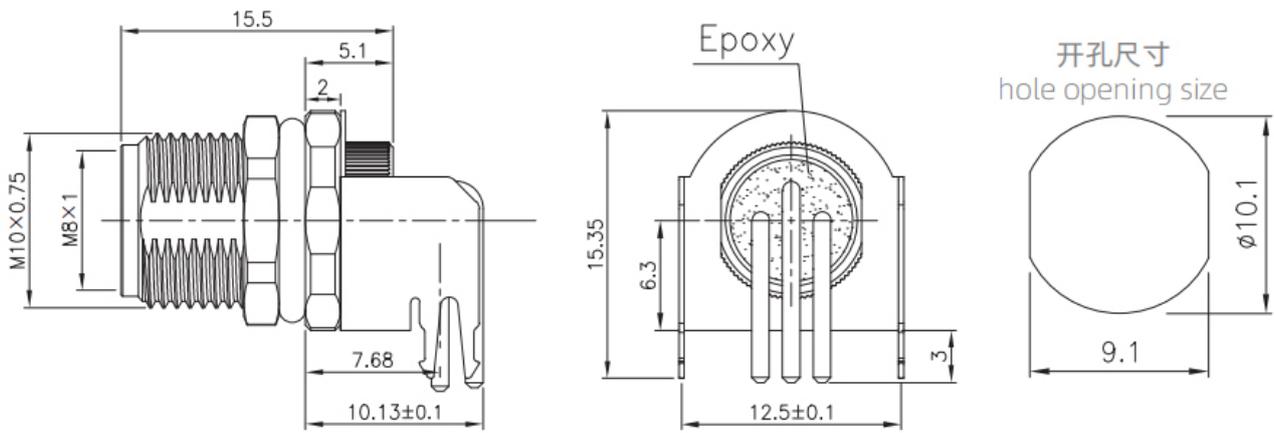


- 欧标连接器 M8系列，
- 结构类型：弯针插座，
- 接线类型：PCB板式，
- 插针类型：孔型，
- 芯数：3，4，5，6，8 pin，
- 接地：是，
- 认证：CE RoHS，
- 标准：IEC 61076-2-104，

机械参数

| | |
|-------|----------------------------|
| 壳体材料： | 黄铜镀镍/锌合金度镍 |
| 胶芯材料： | PA66 |
| 密封材料： | 环氧树脂/橡胶 |
| 插针材料： | 黄铜/磷铜镀金 |
| 成型材料： | TPU/PVC |
| 绝缘阻抗： | $\geq 100 \text{ M}\Omega$ |
| 接触阻抗： | $\leq 5 \text{ m}\Omega$ |
| 插拔次数： | ≥ 500 次 |
| 适用温度： | -25°C ~ +80°C |
| 防护等级： | IP65/IP67 |
| 执行标准： | IEC 61076-2-104 |













尺寸图



PCB弯式芯位图(接地款)

| 3 | 4 | 4D |
|---|--|--|
| <p>Diagram showing 3 pins with dimensions: total width 12.5, pin diameter 3-$\phi 1.2$, distance from center to mounting edge 1.75, and distance between pins 3.5.</p> | <p>Diagram showing 4 pins with dimensions: total width 12.5, pin diameter 4-$\phi 1.2$, distance from center to mounting edge 1.95, distance between pins 2.15 and 5.19, and distance from center to mounting edge 3.4.</p> | <p>Diagram showing 4 pins with dimensions: total width 12.5, pin diameter 4-$\phi 0.8$, distance from center to mounting edge 3.3, and distance between pins 3.3.</p> |
| 5 | 6 | 8 |
| <p>Diagram showing 5 pins with dimensions: total width 12.5, pin diameter 5-$\phi 1.2$, distance from center to mounting edge 1.45, distance between pins 1.95, and distance from center to mounting edge 3.4.</p> | <p>Diagram showing 6 pins with dimensions: total width 12.5, pin diameter 6-$\phi 0.8$, distance from center to mounting edge 1.73, distance between pins 0.74, 3.5, and 1.9, and distance from center to mounting edge 2.74.</p> | <p>Diagram showing 8 pins with dimensions: total width 12.5, pin diameter 8-$\phi 0.8$, distance from center to mounting edge 2.05, distance between pins 0.35, 1.2, 2.9, 1.85, 1.65, and 3.7, and distance from center to mounting edge 1.8.</p> |

电气参数

| 芯数 Pins | 针型 Male | | | 额定电流 Rated current | 额定电压 Rated voltage | | 导体规格 Conductor size | | 孔型 Female | | |
|------------|--|---|---|---|--|-----|------------------------|-----------------|--|---|---|
| | A | B | D | | A/C | D/C | AWG | mm ² | A | B | D |
| 3 |  | | | 3A | 60V | 60V | 24 | 0.25 |  | | |
| 4 |  | |  | A型(A-Code): 3A D型(D-Code): 4A | A型(A-Code): 60V D型(D-Code): 48V | 60V | 24 | 0.25 |  | |  |
| 5 | |  | | 3A | 30V | 30V | 24 | 0.25 | |  | |
| 6 |  | |  | A型(A-Code): 1.5A D型(D-Code): 1.5A/3A | 30V | 30V | 26 | 0.14 |  | |  |
| 8 |  | | | 1.5A | 30V | 30V | 26 | 0.14 |  | | |

订购产品

| 产品名称 | 螺牙 | 结构 | 芯数 | 产品型号 | 3D下载 | 2D下载 |
|--------------|----------|--------------|----|-------------------|------|-------------------|
| M8弯针孔型插座-3A芯 | M10x0.75 | 插板式(PCB),接地款 | 3A | M8-S3A-GPL M10-JD | | ↓ |
| M8弯针孔型插座-4A芯 | M10x0.75 | 插板式(PCB),接地款 | 4A | M8-S4A-GPL M10-JD | | ↓ |
| M8弯针孔型插座-4D芯 | M10x0.75 | 插板式(PCB),接地款 | 4D | M8-S4D-GPL M10-JD | | ↓ |
| M8弯针孔型插座-5B芯 | M10x0.75 | 插板式(PCB),接地款 | 5B | M8-S5B-GPL M10-JD | | ↓ |
| M8弯针孔型插座-6A芯 | M10x0.75 | 插板式(PCB),接地款 | 6A | M8-S6A-GPL M10-JD | | ↓ |
| M8弯针孔型插座-8A芯 | M10x0.75 | 插板式(PCB),接地款 | 8A | M8-S8A-GPL M10-JD | | ↓ |

资料下载

| | |
|-----------------|---------------------------------|
| 产品目录 | CAZN正成-欧标产品选型手册 |
| EMC认证 | 查看 |
| RoHS报告 | 查看 |
| 正成连接器欧标系列-EMC证书 | 查看 |

