




- 产品类型：插拔式端子,
- 接线方式：弹簧连接,
- 间距：7.62mm,
- 电压：600V,
- 电流：41A,
- 位数：2-14P

基本参数

间距(Pitch):	7.62mm
电压(Rated voltage)-UL:	600V
电流(Rated current)-UL:	41A
电压(Rated voltage)-IEC:	1000V
电流(Rated current)-IEC:	41A
线径(Wire range)-UL:	24-8AWG
线径(Wire range)-IEC:	0.2-6mm ²
位数(Pole number):	02~14P
绝缘材料(Insulation Material):	PA66 UL94 V-0
电流承载部件材料和镀层(Material & Plating of Current carrier):	Copper alloy, Tin plated
绝缘电阻(Insulation Resistance):	500MΩ or more at DC500V
耐电压(1分钟)(Withstanding Voltage/1Min):	3300V
额定冲击电压(Rated surge voltage):	8000V
接线螺丝(Wire clamp unit Screw), 最大扭矩(torque Max.):	M3, 0.5N.m(0.8N.m Max)
固定螺丝(Mounting Screw), 扭矩(torque):	M3, 0.3-0.4N.M
接线弹片材料(Material of Clamp spring):	Stainless Steel
剥线长度(Wire stripping length):	10mm
使用温度(Operating temperature):	-40℃ ~ +115℃
焊接方式(Soldering recommend):	-
认证(Approval):	

尺寸图

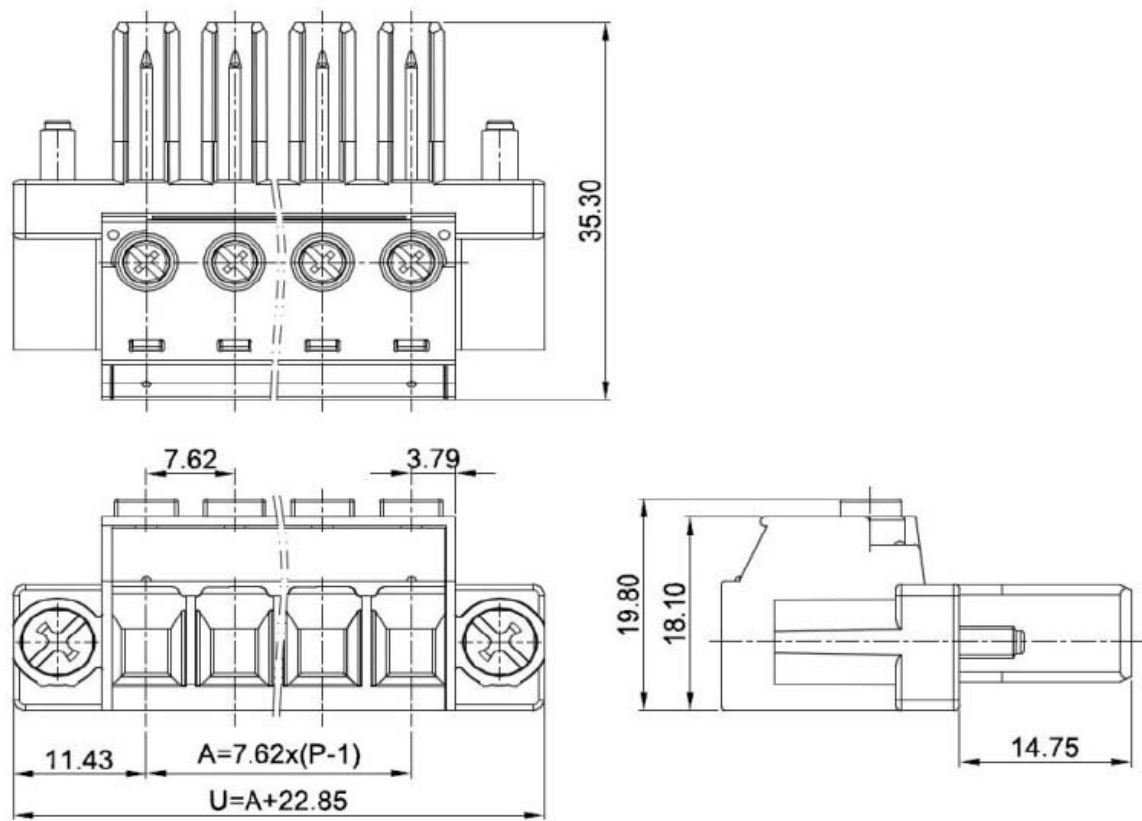

订购产品

产品名称	间距	位数	产品型号	3D下载	2D下载
插拔式端子	7.62mm	02~14P	SPA762-W01		

资料下载

产品目录	接线端子选型手册
------	--------------------------